


OPERATION

This valve allows free flow from 2 to 1 and blocks flow from 1 to 2.

SPECIFICATIONS

Theoretical performance

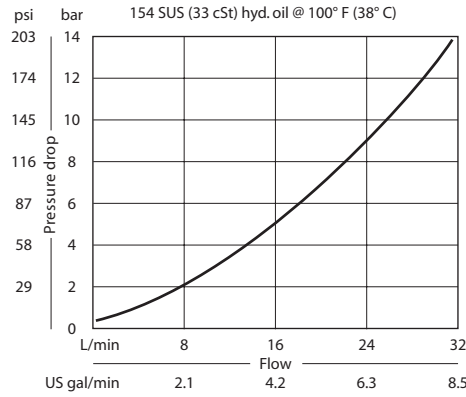

Schematic




Specifications

Rated pressure	350 bar 5075 psi
Rated flow at 7 bar	20 l/min
100 psi	5 US gal/min
Leakage	6 drops/min @ 207 bar 3000 psi
Weight	0.05 kg 0.11 lb
Cavity	SDC08-2

DIMENSIONS

mm in

Cross-sectional view

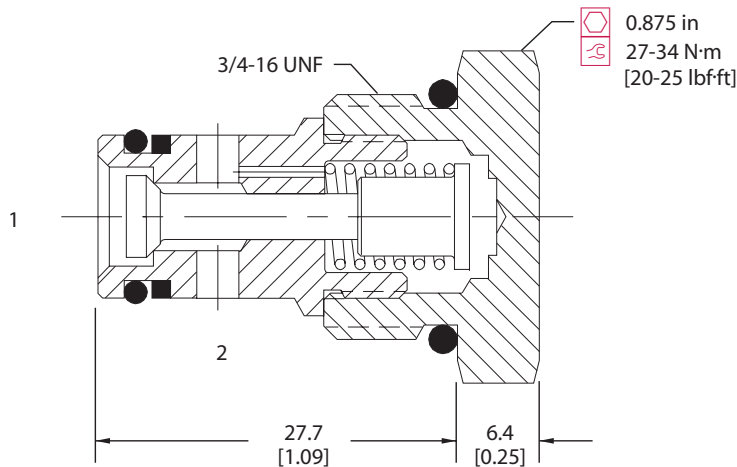

ORDERING INFORMATION

CP108-2-B-6S-005

Housing and ports

- 0 = No Housing
- DG2B = Al, 1/4 BSP
- DG3B = Al, 3/8 BSP
- 4S = Al, #4 SAE
- 6S = Al, #6 SAE
- Other housings available

Housing P/N

- No Housing
- SDC08-2-DG-2B
- SDC08-2-DG-3B
- CP8-2-4S
- CP8-2-6S

Crack pressure

- 005 = 0.34 bar [5 psi]
- 015 = 1.0 bar [15 psi]
- 030 = 2.1 bar [30 psi]
- 050 = 3.4 bar [50 psi]
- 065 = 4.5 bar [65 psi]
- 100 = 6.9 bar [100 psi]

Seals

- B = Buna-N 120221
- V = Viton 120222