


OPERATION


This is a single counterbalance HIC (on B port) that mounts to DS motors with manifold mount porting.

Schematic



SPECIFICATIONS

Theoretical performance

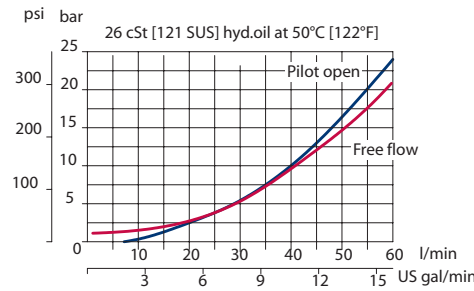


Specifications

Rated pressure	210 bar [3045 psi]
Rated flow at 22 bar [319 psi]	60 l/min [16 US gal/min]
Leakage	6 drops/min @ 70% of crack pressure
Weight	1.60 kg [3.53 lb]
Pilot ratio	3.0:1, 4.5:1, 10.0:1
Cartridge	CB10 HV
Plug	SDC10-V-3S-B1
Service mount kit	11023865
Motor	DS

DIMENSIONS

Cross-sectional view

mm [in]

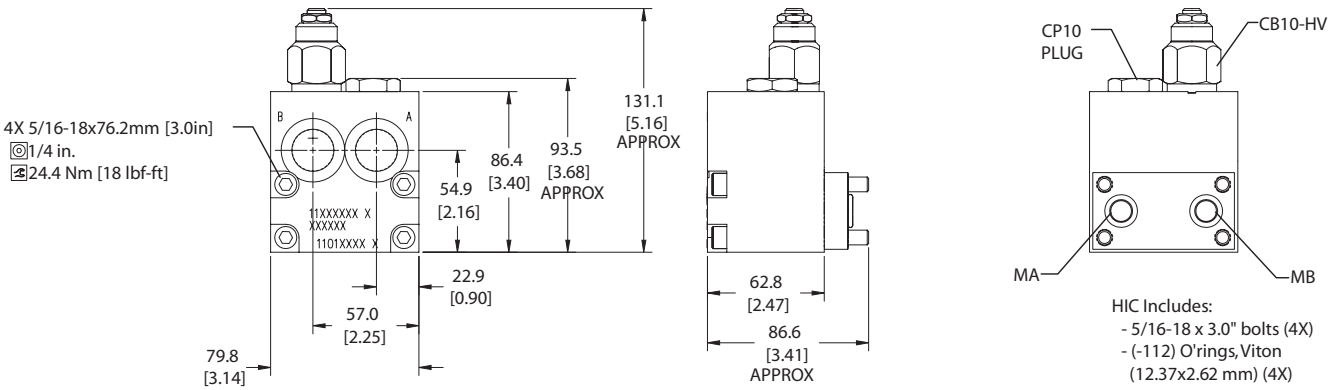

HIC Includes:
 - 5/16-18 x 3.0" bolts (4X)
 - (-112) O'rings, Viton (12.37x2.62 mm) (4X)

ORDERING INFORMATION

