


OPERATION


This is a single cross-port relief (B to A) HIC that mounts to OMS motors with BSP porting.

Schematic



SPECIFICATIONS

Theoretical performance

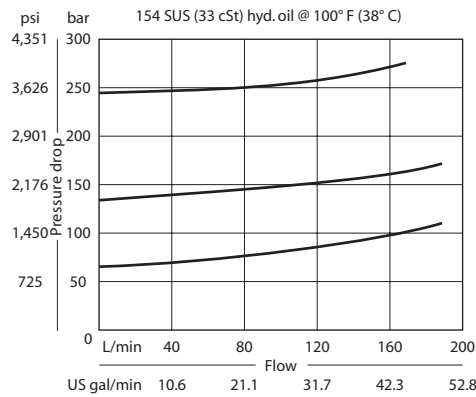

Specifications

Rated pressure	210 bar [3045 psi]
Rated flow at 7 bar [102 psi]	190 l/min [50 US gal/min]
Leakage	82 cm ³ /min [5 in ³ /min] @ 207 bar [3000 psi]
Weight	1.60 kg [3.53 lb]
Cartridge	CP211-2
Plug	CP12-V-2-B
Service mount kit	11023866
Motor	OMS


DIMENSIONS

Cross-sectional view

mm [in]

HIC Includes:
 - M10x50mm bolts (2X)
 - (-119) O'rings, Viton (23.47x2.62 mm) (2X)

2X M10x1.5x50mm [1.97in]
 8mm
 75 Nm [55 lbf-ft]

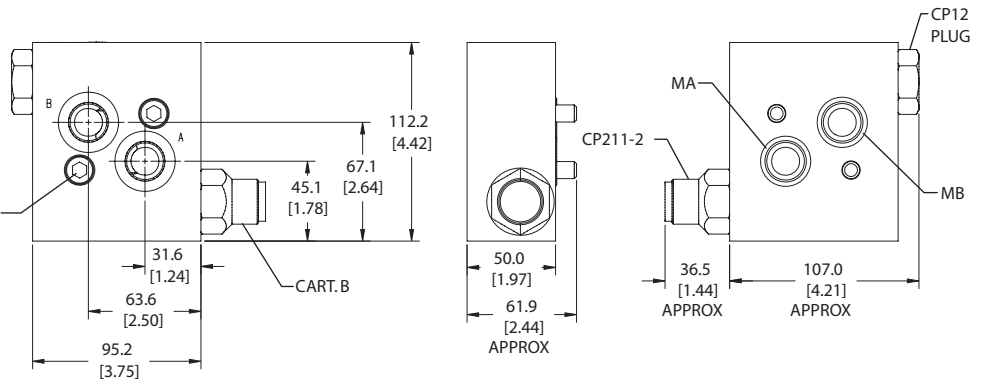

ORDERING INFORMATION

MM-OMS-00-BCP211-2-B-10S-E-C-254

